



PERFORMANCE YOU NEED
QUALITY YOU TRUST

VT-DVR04

FOUR CHANNEL DIGITAL VIDEO RECORDER



Rear Of DVR

FEATURES:

- ▶ 120 FPS REAL TIME RECORDING AND DISPLAY
- ▶ EXPANDABLE MEMORY (AVAILABLE WITH 60, 120 OR 180GB HDD)
- ▶ IR REMOTE CONTROL INCLUDED
- ▶ AUDIO RECORDING (2 CHANNELS)
- ▶ P/T/Z CONTROL (LEADING BRANDS SUPPORTED)
- ▶ REMOTE VIEWING VIA ETHERNET NETWORK (LAN/WAN)

The VT-DVR04 four channel DVR combines high quality digital video recordings with the operating ease of a VCR. It's capable of delivering images with resolution above that of super VHS with versatile recording modes from 1 to 60 images per second.

PRELIMINARY SPEC SHEET




Industrial Video Products, Inc.

"Quality Products At An Affordable Price"

Specifications

VT-DVR04

Video Format	NTSC
Video Input	4 Video Input, Composite BNC
Video Output	Playback (BNC), Playback (RCA), and Input Video Loopback (BNC)
Audio Input	2-Channel Monaural Recording (RCA)
Audio Output	Monaural Playback (RCA)
Network	RJ-45 for Ethernet
R/C Extension	IR Sensor Extension Slot
Alarm Output	Terminal Block, Max 1A, 5 or 12 Volt High Active
Sensor Input	Terminal Block (Normal Open)
Ptz Control	RS-485 or RS-232C (Switch Selectable)
Trigger Output	Sync Pulse for Camera Switch (Active Low TTL Level, 1 Pulse Every 1 Second)
Usb Memory	USB Memory Can Be Connected for Compressed Video Export and Program Download
Recording Speed	Real-Time Recording for All 4 Channels
Picture Resolution	Field: 720X240, Frame: 720X480
Picture Quality	5 Levels
Codec	MPEG-2
Recording Mode	Continuous, Alarm, Motion Detection, and No Recording
Audio Recording	2-Channels, Monaural, Records ONLY with 15FPS or Higher Recording Speed
Search Mode	Time/Date
Playback Mode	Forward (X1 to X8), Reverse (X1 to X8), Still Advance
Internal Hard Drives	60GB Default, Space for 1 Additional Hard Drive
Usb Memory	Compressed Data Export (for ~3 secs of footage)
Ethernet	ISDN, xDSL
CQ-Net Remote Software	For Live Video Monitoring, Recorded Video Transmission and Playback, File Playback and Configuration Change
Power	100 VAC- 250 VAC
Power Consumption	30 Watts
Operating Condition	41°F to 104°F (5°C to 40°C)

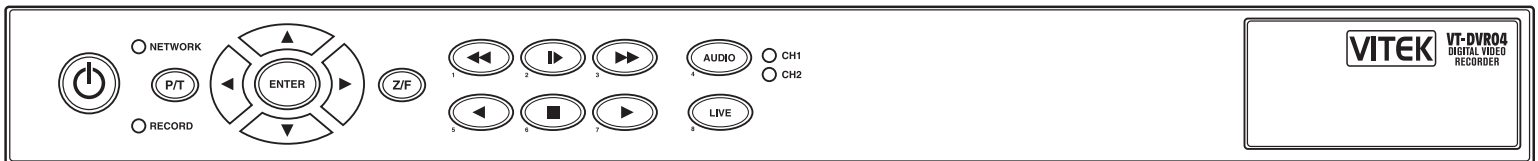

9970 GLENOAKS BLVD. UNIT B SUN VALLEY, CA 91352
 PHONE: 888-VITEK-70 818-771-0300 FAX: 818-771-0400
WWW.VITEKCCTV.COM